
CONFIDENTIAL & PROPRIETARY INFORMATION

This document contains Confidential and Proprietary Information of Alliance LLC, and all design, manufacturing, reproduction, use, and sale rights of such information are expressly reserved

ALL DIMENSIONS ARE IN MM

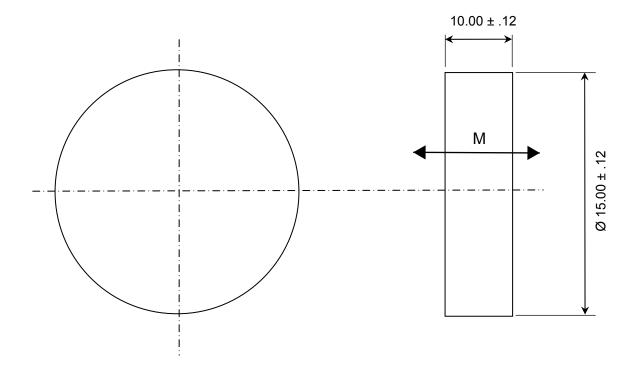

NOTES:

1. MAGNET PROPERTIES PER S22:

Br: 9,500-10,000 G Hc: 9,000-9,500 Oe Hci: ≥15,000 Oe T max: 250 C

2. SUPPLED MAGNETIZED ACROSS THE THICKNESS

(4		
	REACH COMPLIANT	

REV	DESCRIPTION	DATE	BY
В	Changed CAD, incl cert, 3D	2/11/20	ВТ

TOLERANCES (UNLESS OTHERWISE NOTED) DECIMAL METRIC X.XX = ± .01 X.X = ± .25 X.XXX = ± .005 X.XX = ± .13 ANGLES ± .5°

DO NOT SCALE DRAWING

1450 CLARK DRIVE, VALPARAISO, INDIANA 46385					
DESCRIPTION: 15.0 mm x 10.0 mm DISC MAGNET					
Samarium Cobalt	P/N: ALC15010				
GRADE: S22"	Drwg by: BT	REV LEVEL: B"			
COATING: None"	Appr by: DV	Appr. Dated: 08-18-2019"			

Alliance LLC