


| Part Number | A | B | C |
|-------------|-------|------|------|
| CS-0038 | 3.00 | 3.00 | 1.75 |
| CS-0039 | 3.00 | 3.00 | 2.00 |
| CS-0032 | 3.00 | 3.00 | 2.25 |
| CS-0295-5 | 3.00 | 3.00 | 2.50 |
| CS-0295-6 | 3.00 | 3.00 | 2.75 |
| CS-0295-8 | 3.00 | 3.00 | 3.25 |
| CS-0314-9 | 3.00 | 3.00 | 3.50 |
| CS-0295-11 | 3.00 | 3.00 | 4.00 |
| CS-0295-13 | 3.00 | 3.00 | 4.50 |
| CS-0296-3 | 4.00 | 3.00 | 2.00 |
| CS-0296-4 | 4.00 | 3.00 | 2.25 |
| CS-0296-5 | 4.00 | 3.00 | 2.50 |
| CS-0296-7 | 4.00 | 3.00 | 3.00 |
| CS-0296-9 | 4.00 | 3.50 | 3.00 |
| CS-0297-7 | 4.00 | 4.00 | 3.00 |
| CS-0296-13 | 4.00 | 4.50 | 3.00 |
| CS-0297-3 | 4.00 | 4.00 | 2.00 |
| CS-0297-4 | 4.00 | 4.00 | 2.25 |
| CS-0297-5 | 4.00 | 4.00 | 2.50 |
| CS-0296-11 | 4.00 | 4.00 | 3.00 |
| CS-0297-9 | 4.00 | 4.00 | 3.50 |
| CS-0297-11 | 4.00 | 4.00 | 4.00 |
| CS-0297-13 | 4.00 | 4.00 | 4.50 |
| CS-0297-15 | 4.00 | 5.00 | 4.00 |
| CS-0298-3 | 5.00 | 3.00 | 2.00 |
| CS-0298-4 | 5.00 | 3.00 | 2.25 |
| CS-0298-5 | 5.00 | 3.00 | 2.50 |
| CS-0298-7 | 5.00 | 3.00 | 3.00 |
| CS-0298-9 | 5.00 | 3.50 | 3.00 |
| CS-0299-7 | 5.00 | 4.00 | 3.00 |
| CS-0298-13 | 5.00 | 4.50 | 3.00 |
| CS-0298-15 | 5.00 | 5.00 | 3.00 |
| CS-0299-3 | 5.00 | 4.00 | 2.00 |
| CS-0299-4 | 5.00 | 4.00 | 2.25 |
| CS-0299-5 | 5.00 | 4.00 | 2.50 |
| CS-0298-11 | 5.00 | 4.00 | 3.00 |
| CS-0299-11 | 5.00 | 4.00 | 4.00 |
| CS-0299-13 | 5.00 | 4.50 | 4.00 |
| CS-0300-11 | 5.00 | 5.00 | 4.00 |
| CS-0300-4 | 5.00 | 5.00 | 2.25 |
| CS-0300-5 | 5.00 | 5.00 | 2.50 |
| CS-0300-13 | 5.00 | 5.00 | 4.50 |
| CS-0301-4 | 6.00 | 3.00 | 2.25 |
| CS-0301-5 | 6.00 | 3.00 | 2.50 |
| CS-0301-11 | 6.00 | 4.00 | 3.00 |
| CS-0301-13 | 6.00 | 4.50 | 3.00 |
| CS-0302-4 | 6.00 | 4.00 | 2.25 |
| CS-0302-5 | 6.00 | 4.00 | 2.50 |
| CS-0302-11 | 6.00 | 4.00 | 4.00 |
| CS-0302-13 | 6.00 | 4.50 | 4.00 |
| CS-0305-11 | 10.00 | 5.00 | 4.00 |
| CS-0305-15 | 10.00 | 5.50 | 5.00 |


ALL DIMENSIONS ARE IN MM

CONFIDENTIAL & PROPRIETARY INFORMATION
 This document contains Confidential and Proprietary Information of Alliance LLC, and all design, manufacturing, reproduction, use, and sale rights of such information are expressly reserved

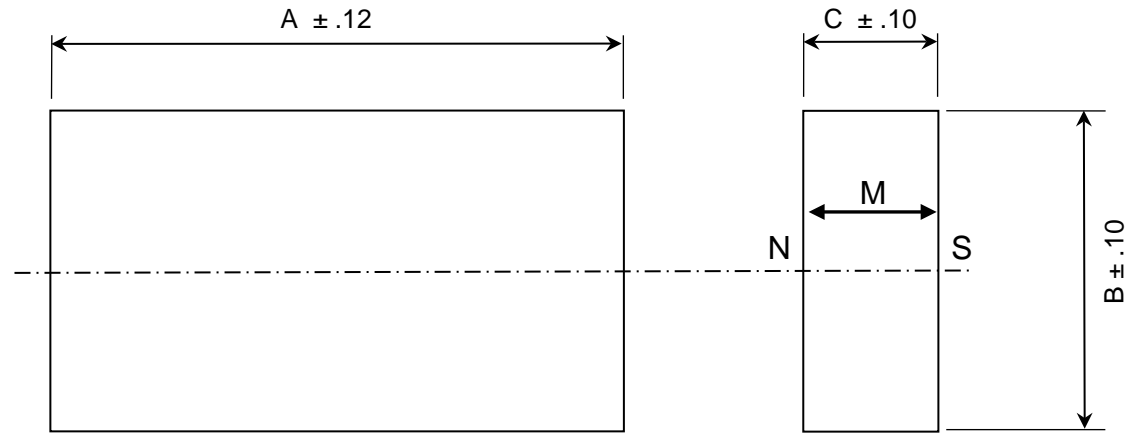

MAGNET PROPERTIES PER N-44H+:

Br: 13,000-13,500 G
 Hc: 11,300-12,600 Oe
 Hci: ≥17,000 Oe
 BH_(max): 42-44 MGOe
 Operating T max: 140° C
 Magnetic loss: -0.11%Br/°C



| | | |
|---|------------|------------------------|
| Alliance LLC | | |
| 1450 CLARK DRIVE, VALPARAISO, INDIANA 46385 | | |
| DESCRIPTION: RARE EARTH BLOCK MAGNET | | |
| P/N: CS-0XXX-XX | | SENSOR MAGNET |
| MATERIAL: NdFeB | Dwg by: BT | REV LEVEL: A |
| COATING: None | Apr by: DV | Apr. Dated: 02-18-2020 |

| | |
|--|--------------|
| TOLERANCES (UNLESS OTHERWISE NOTED) | |
| DECIMAL | METRIC |
| X.XX = ± .01 | X.X = ± .25 |
| X.XXX = ± .005 | X.XX = ± .13 |
| ANGLES ± .5° | |
| DO NOT SCALE DRAWING | |