


- Meets IEEE 802.3ab Standards.
- RoHS Compliant.
- 10/100/1000 Base-T, Surface Mount Type, Open Header .
- Operating temperature range: 0°C to +70°C



Electrical Specifications @25°C


Part Number	OCL(μH Min) @100KHz,0.2V With 8mA DC Bias	Turns Ratio (±5%)	Insertion Loss (dB Max)				Return Loss (dB Min)			Cross talk (dB Min)		CMRR (dB Min) 0.5-100MHz	HI-POT (Vrms)
			0.5-100MHz	0.5-30MHz	30.1-60MHz	60.1-80MHz	0.5-40MHz	40.1-100MHz	0.5-100MHz				
G4811CG	350	1CT:1CT	-1.1	-18	-12+20*log(f/80)	-12	-35	-33+20*log(f/50)	-30	1500			

MECHANICAL

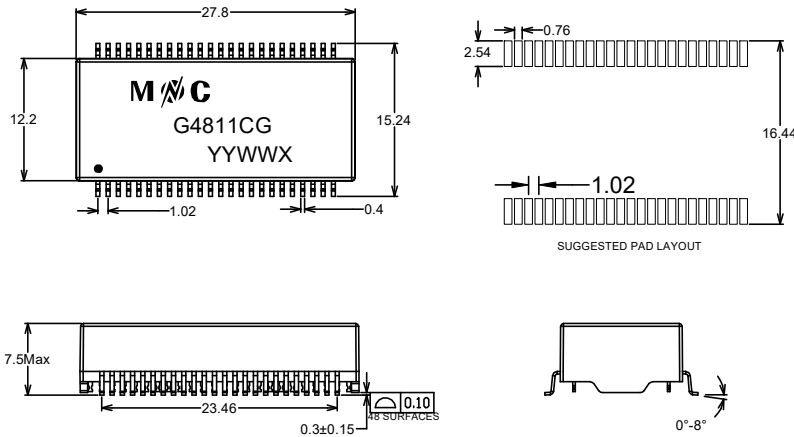

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

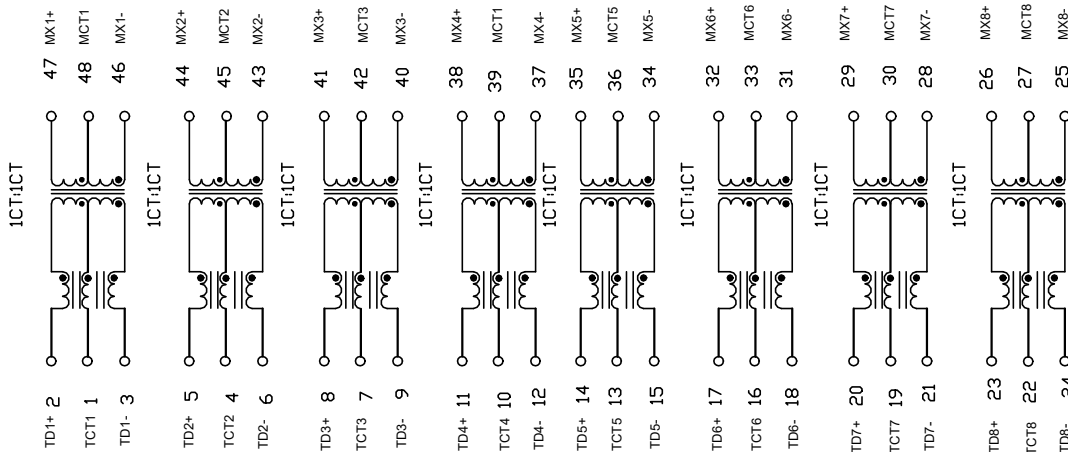

PAN SIZE: 300PCS/REEL
UNIT WEIGHT: 3.3g