MPS4992

SILICON BI-DIRECTIONAL SWITCH



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR MPS4992 is a silicon bi-directional switch designed for full-wave TRIAC and half-wave SCR triggering applications.



MARKING: FULL PART NUMBER

MAXIMUM RATINGS: (T_A=25°C unless otherwise noted)

` ' ' ' '	SYMBOL		UNITS
DC Forward Current	Ι _F	200	mA
Peak Repetitive Forward Current (T _A =100°C)			
(1% Duty Cycle, tp=10µs)	I _{FM}	2.0	Α
DC Gate Current (off-state)	I_{G}	5.0	mA
Power Dissipation	P_{D}	500	mW
Operating Junction Temperature	T_J	-55 to +125	°C
Storage Temperature	T _{sta}	-65 to +150	°C

ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)


CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
Switching Voltage	V_S		7.5	9.0	V
Switching Current	I_S			120	μΑ
Holding Current	Ι _Η			500	μΑ
Off-state Blocking Current	I_{B}	V _F =5.0V		0.1	μΑ
Forward Voltage	V_{F}	I _F =200mA		1.7	V

MPS4992

SILICON **BI-DIRECTIONAL SWITCH**



TO-92 CASE - MECHANICAL OUTLINE

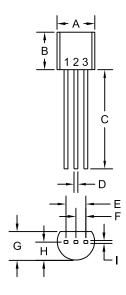

DIMENSIONS				
	INCHES		MILLIMETERS	
SYMBOL	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
В	0.170	0.210	4.32	5.33
С	0.500	ı	12.70	-
D	0.016	0.022	0.41	0.56
Е	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
Н	0.080	0.105	2.03	2.67
	0.015		0.38	

TO-92 (REV: R1)

LEAD CODE: 1) MT1 2) Gate 3) MT2

R1

MARKING: FULL PART NUMBER


MPS4992

SILICON BI-DIRECTIONAL SWITCH



R3 (16-April 2013)

TYPICAL ELECTRICAL CHARACTERISTICS

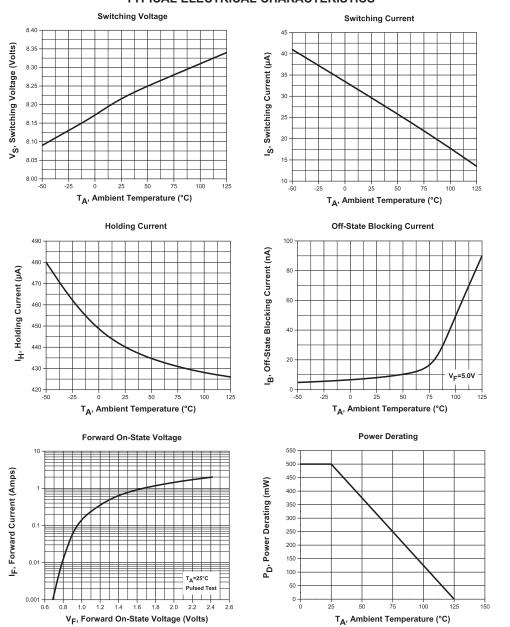

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- · Inventory bonding
- · Consolidated shipping options

- · Custom bar coding for shipments
- · Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free guick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- · Custom electrical curves
- · Environmental regulation compliance
- · Customer specific screening
- · Up-screening capabilities

- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- · Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- 2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110 Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors:

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms

www.centralsemi.com (001)



Product End of Life Notification

PDN ID:	PDN01122
Notification Date:	4/23/19
Last Buy Date:	
Last Shipment Date	Stock Only

Please be advised that Central Semiconductor must immediately discontinue the product(s) listed in the attached PDN notice. We are unable to accept any further orders for these products <u>unless</u> we have available inventory on hand.

You may have purchased one or more of the products listed. Please do not hesitate to contact your local Central Semiconductor sales representative with any questions or needs you may have. Central regrets any inconvenience this may cause.

Sincerely,

Central Semiconductor Corp.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

CCC785 REV 002



Product End of Life Notification

PDN ID:	PDN01122
Notification Date:	4/23/19
Last Buy Date:	
Last Shipment Date	Stock Only

Summary: The CP692 bi-directional switch die process is discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Management Process. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

l Part Number	Replacement	
MPS4992-CM	N/A, Stock Only	
MPS4992-CT	N/A, Stock Only	
MPS4992-WN	N/A, Stock Only	
92	N/A, Stock Only	
92 APM	N/A, Stock Only	
92 TRE	N/A, Stock Only	
MPS4992-CM MPS4992-CT MPS4992-WN 92 92 APM	N/A, Stock Only N/A, Stock Only N/A, Stock Only N/A, Stock Only N/A, Stock Only	

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centralsemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

CCC785 REV 002